


B.O.M. for PD-XXX XXX= Length in Centimeters			
ITEM	QTY.	PART NO.	DESCRIPTION
1	XXX CM	-	12 AWG THHN 90 DEG C OR EQUIV - BLUE
2	XXX CM	-	12 AWG THHN 90 DEG C OR EQUIV - BROWN
6	2	802303-C06	ANDERSON 1330 CONNECTOR W/CONTACT-BLUE
7	2	802303-C09	ANDERSON 1330 CONNECTOR W/CONTACT-BROWN
10	(A)	010218-03	NYLON WIRE/CABLE TIE - 4 LG. (SEE NOTE 1)
11	2	802420-01	HEAT SHRINK, WHITE PRINTABLE (SEE NOTE 2)

(A) QTY = XXX / 15

ASSEMBLY NOTES:

1. AFTER HARNESS IS WIRED, USE ITEM #10 TO TIE WRAP ITEMS #1 AND #2 TOGETHER EVENLY SPACED ALONG THE LENGTH OF CABLE ASSEMBLY.
2. MARK TEXT OF PART NUMBER (PD-XXX WHERE XXX = LENGTH IN CM) AT APPROXIMATE POSITION SHOWN IN BLACK UPPER CASE GOTHIC STYLE CHARACTERS. CHARACTERS SHALL BE CLEARLY LEGIBLE AND SHARPLY DEFINED. MARKING MATERIAL SHALL BE PERMANENT, NON-NUTRIENT AND NON-CONDUCTIVE.
3. PLACE LABEL APPROXIMATELY 1" FROM TERMINATION POINT TO BEGINNING OF LABEL EDGE.
4. LABEL MUST BE A HEAT SHRINKABLE WIRE MARKER SLEEVE. HANDWRITTEN OR WRAP AROUND TYPE LABELS ARE NOT ACCEPTABLE.
5. FOLLOW MANUFACTURERS INSTRUCTIONS FOR WIRE STRIP LENGTH AND RECOMMENDED TIGHTENING TORQUE ON ALL SCREW TERMINATIONS

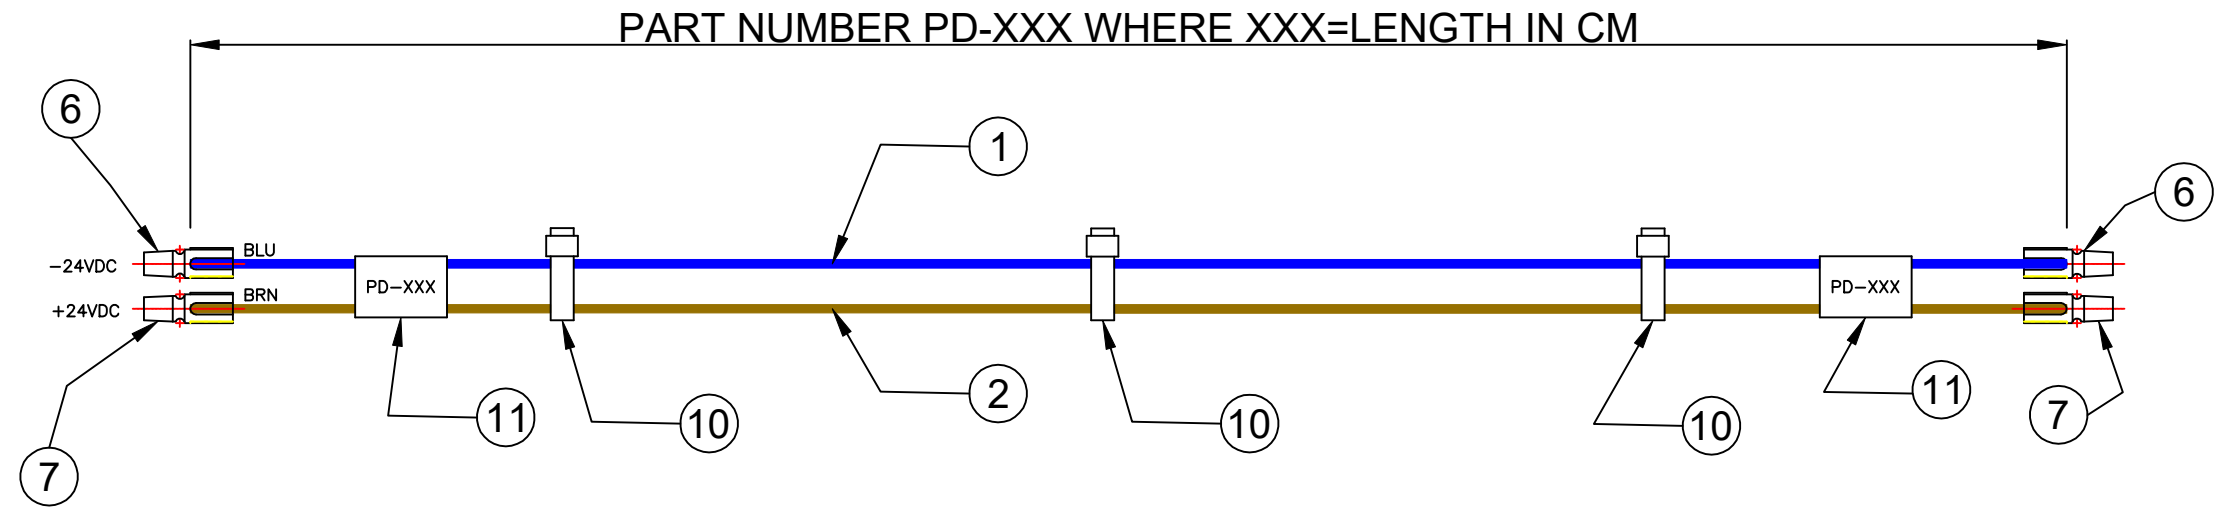

REV.	DATE	DESCRIPTION	✓	THE INFORMATION CONTAINED HEREIN IS CONFIDENTIAL, IS SUBMITTED IN CONFIDENCE, AND IS PROPRIETARY INFORMATION OF PULSEROLLER AND SHALL BE USED ONLY IN CONJUNCTION WITH AND PERFORMANCE OF THE CONTRACT OF WHICH THIS DRAWING FORMS A PART, AND SHALL NOT, WITHOUT PULSEROLLER PRIOR WRITTEN APPROVAL, BE REPRODUCED OR IN ANY OTHER WAY USED IN WHOLE OR IN PART BY OTHERS.	DATE: 16-APR-2020 DESIGNED BY: JPK CHECKED BY: SCALE: NONE SHEET: 1 OF 1	TITLE: POWER DISTRIBUTION HARNESS PART NUMBER PD-XXX FOR: CONVEYLINX ACCESSORIES PULSEROLLER STANDARDS DWG. NO: PD-XXX	REV:
------	------	-------------	---	---	--	--	------